

6K

SUPERIOR PERFORMANCE AS YOU CAN SEE & EXPERIENCE

Flashforge FOTO 9.25 6K
New Upgrade



Brand-new Upgrade Experience Doubled



Enlarged Space

Build Volume
197*122*200mm



Professional Slicer

Equipped with a professional self-developed slicing software




High-performance Z-axis

Dual Linear Guide Rail
Rod Motor
Anti-backlash Nut Combination




9.25-inch Monochrome Screen

New Upgrade



6K HD Resolution

Resolution: 5760*3600

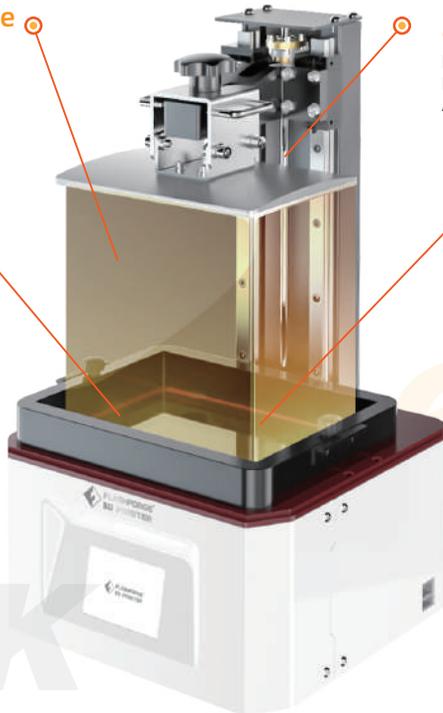

Neotech Co., Ltd.
บริษัท นีโอดิจิทัล จำกัด
โครงการ เจ เอส พี, เฟส 4
89/7 ก ตำบลพุดกุ่ม แขวงคลองสองนารพรม
เขตบางบอน กรุงเทพฯ 10150
Tel : 096-140-0420
098-448-4676
E-mail : Sales@print3dd.com

5760 X 3600


Pursuing Higher Precision

With the newly upgraded 6K HD screen of the resolution as high as 5760*3600, Foto 9.25 6K can reproduce the model most realistically and capture more details.

Printed by
Foto 9.25 6K



Printed by a common
4K-resolution device

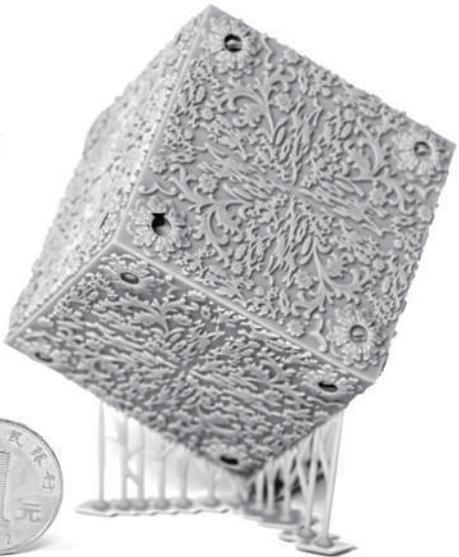

Neotech Co., Ltd.
บริษัท เนotech จำกัด
โครงการเดอะพี.เวิลด์
89/7 ถนนพหลโยธิน แขวงจตุจักร กรุงเทพมหานคร
เขตจตุจักร กรุงเทพฯ 10150
Tel : 096-140-0420
098-448-4676
E-mail : Sales@print3dd.com

4.8L

Build Volume

200%


200% Build Volume Increase (compared with Foto 6.0)

138%

138% Screen Size Upgrade (compared with Foto 6.0)



The build volume is increased and the screen size is expanded.

Foto 9.25 6K possesses a forming size of 197*122*200mm, that is, a total build volume of 4.8 liters. This is a 200% increase over the 1.6 liter build volume of the Foto 6.0.

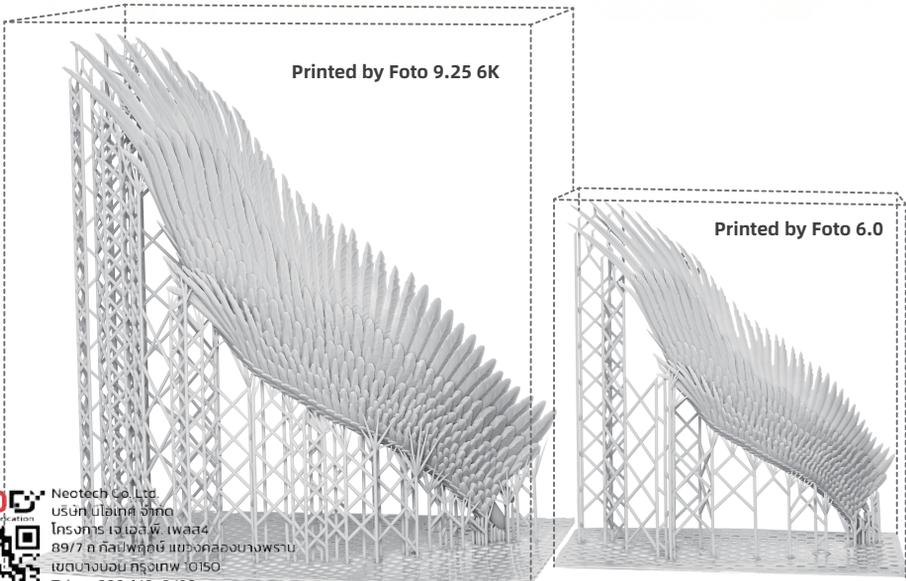


Neotech Co., Ltd.
บริษัท เนโอเทค จำกัด
โรงพิมพ์ 3D เทคโนโลยี
89/7 อ.สามโคก จ.นนทบุรี 11015
Tel : 096-140-0420
098-448-4676

E-mail : Sales@print3dd.com

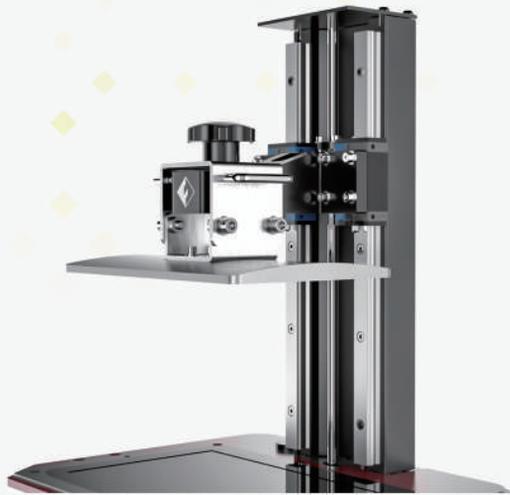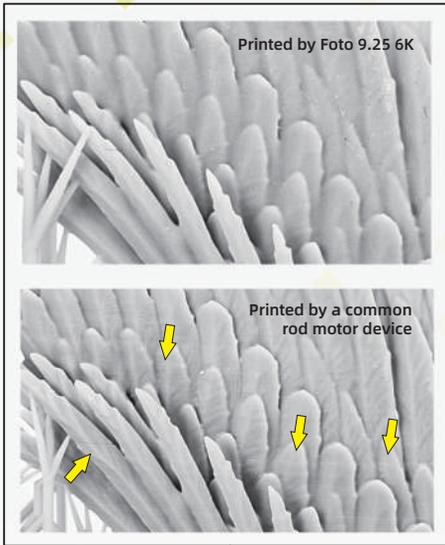

Pursuing More Stable Operation


The combination of dual linear guide rail, rod motor and anti-backlash nut is adopted to ensure the stable and smooth operation of the platform along the Z-axis with accurate positioning and eliminate the layer lines caused during printing.

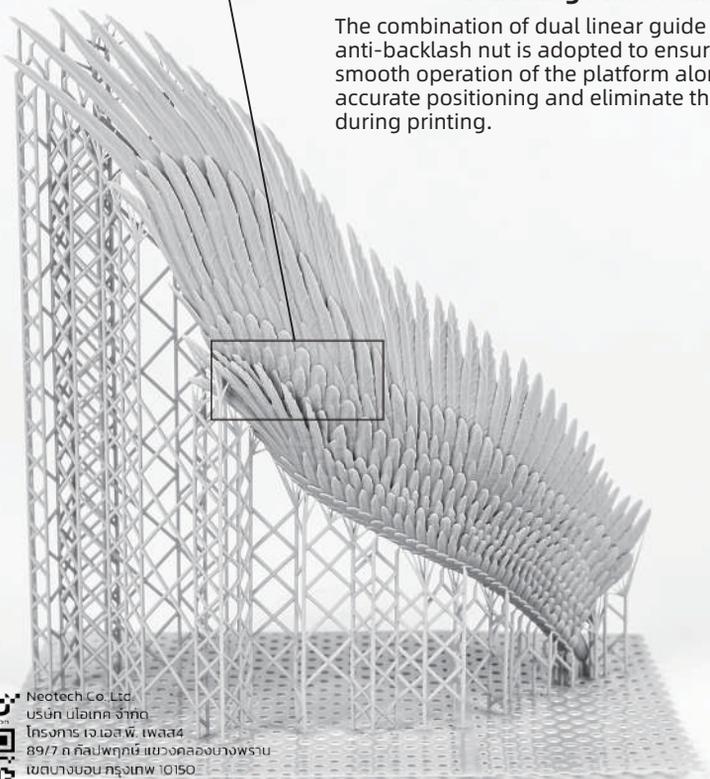

Neotech Co., Ltd.
 บริษัท เนotech จำกัด
 โรงงาน เจ เอชพี, ไร่พลาซ่า
 89/7 น.ก.ป.พฤษภูมิ แขวงจตุรคอสองรังษบุรี
 เขตบางบอน กรุงเทพฯ 10150
 Tel : 096-140-0420
 098-448-4676
 E-mail : Sales@print3dd.com



Neotech Co., Ltd
บริษัท เนotech จำกัด
โทรจากรุงเทพ 096-448-4676
89/7 ถนนพหลโยธิน แขวงคลองจั่น เขตจตุจักร กรุงเทพฯ 10150
Tel : 096-448-0420
098-448-4676
www.print3dd.com E-mail : Sales@print3dd.com

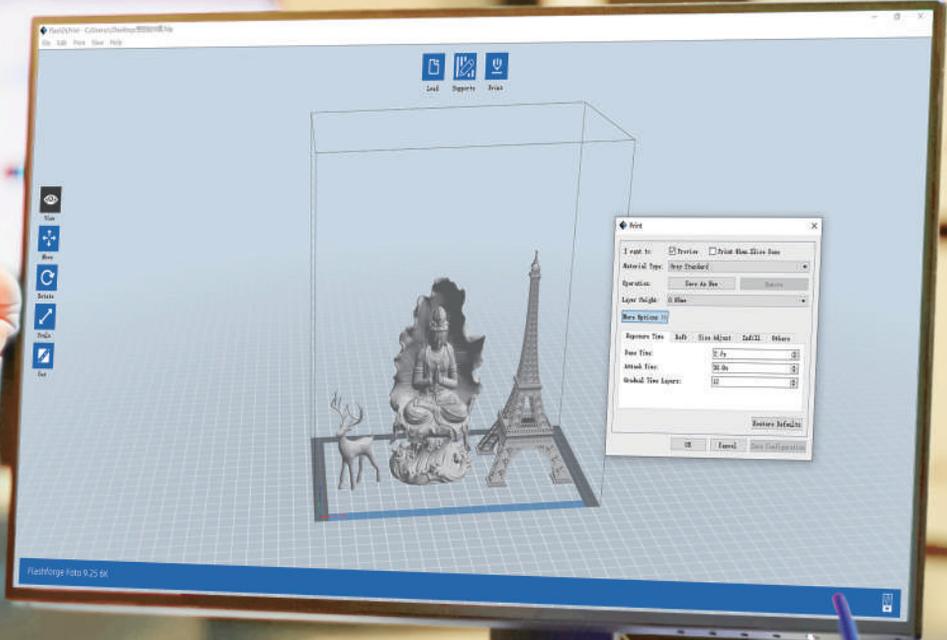

Pursuing Better Experience

Foto 9.25 6K is equipped with a professional self-developed slicing software, of which the interface is simple and easy to operate, the slicing operation is sensitive and is easy for modeling. We're gaining insights into user experience, continuously optimizing and updating our products, only aiming at providing better printing experience to our users.

Foto 9.25 6K Equipment Parameters

| | |
|-------------------|---|
| Printing Speed | 10-50 mm/H |
| Build Volume | 197*122*200 mm |
| Layer Thickness | 0.025-0.2 mm (Adjustable) |
| XY Resolution | 0.05 mm |
| Wavelength | 405 nm |
| Z-Axis | Industrial dual linear guide rail |
| Projection Screen | 9.25-inch industrial 6K monochrome screen |
| Build Plate | Sandblasting platform (increase the adhesion) |
| Vat Capacity | 0.5L |
| Connectivity | USB / Ethernet |
| Power | 120W |
| Equipment Size | 280*240*465mm |
| Display Screen | 3.5-inch touch screen |
| User Experience | Easily-replaceable LCD screen |

