




Adventurer 5M Series

Fast and User-friendly

| Adventurer 5M Pro



| Adventurer 5M

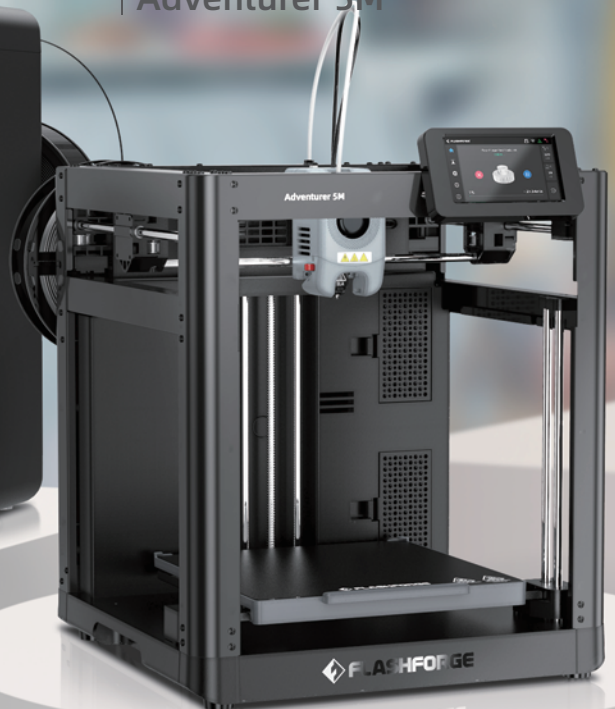

Neotech Co.,Ltd.
บริษัท นีโอเทค จำกัด
โครงการ เจ.เอส.พี. เฟส4
89/7 ถ.กัลปพฤกษ์ แขวงคลองบางพราน
เขตบางบอน กรุงเทพฯ 10150
Tel : 096-140-0420
098-448-4676
E-mail : Sales@print3dd.com


Adventurer 5M series is well-suited for beginners, individual users, families, and educational institutions. Just one-click printing, without complicated operation procedures. Realize your ideas effortlessly.



Full-auto
one-click leveling



Maximum speed
600mm/s



Core XY
structure



3-second
quick-swap nozzle



Dual air filtration
system



50dB silent
printing



available for Pro version

available for Pro version



Full-auto one-click leveling, flawless first layer

Adventurer 5M series features a full-auto one-click leveling system. It measures the distance and then calculates the correct offsets. No tools, no manual Z-axis calibration, while ensuring perfect first layer.

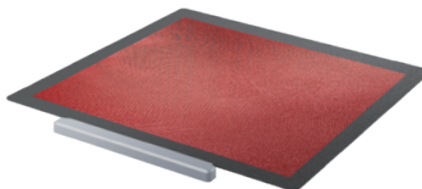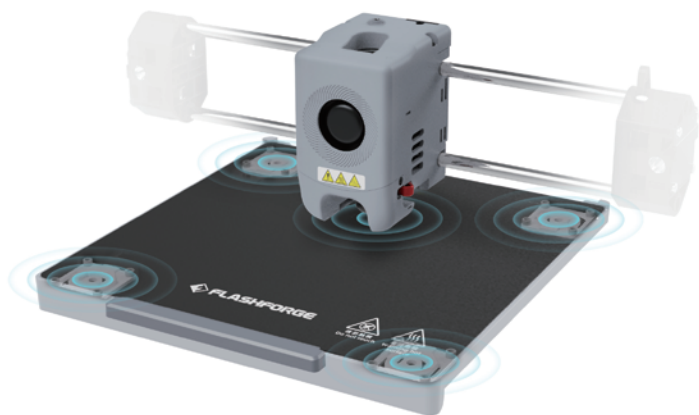

3D
Digital Fabrication



www.print3dd.com

Neotech Co.,Ltd.

บริษัท นีโอเทค จำกัด

โครงการ เจ.เอส.พี. เฟส4

89/7 ถ.กัลปพฤกษ์ แขวงคลองบางพราน

เขตบางบอน กรุงเทพฯ 10150

Tel : 096-140-0420

098-448-4676

E-mail : Sales@print3dd.com

Efficiency and quality combined

10 Minutes

From unboxing to starting printing



10 minutes

From unboxing to starting printing



Printing

Maximum speed **600mm/s**

Maximum acceleration **20000mm/s²**



Less waiting time

Nozzle with a flow of **32mm³/s**

50w heating power

200°C heating up in **35 seconds**



Astronaut

104*118*200mm (228g)

Adventurer 5M series

4h10min

Others

19h20min



3DD
Digital Fabrication



www.print3dd.com

Neotech Co.,Ltd.

บริษัท นีโอเทค จำกัด

โครงการ เจ.เอส.พี. เฟส4

89/7 ถ.กัลปพฤกษ์ แขวงคลองบางพราน





เขตบางบอน กรุงเทพฯ 10150

Tel : 096-140-0420


098-448-4676

E-mail : Sales@print3dd.com

Robust designs for superior quality

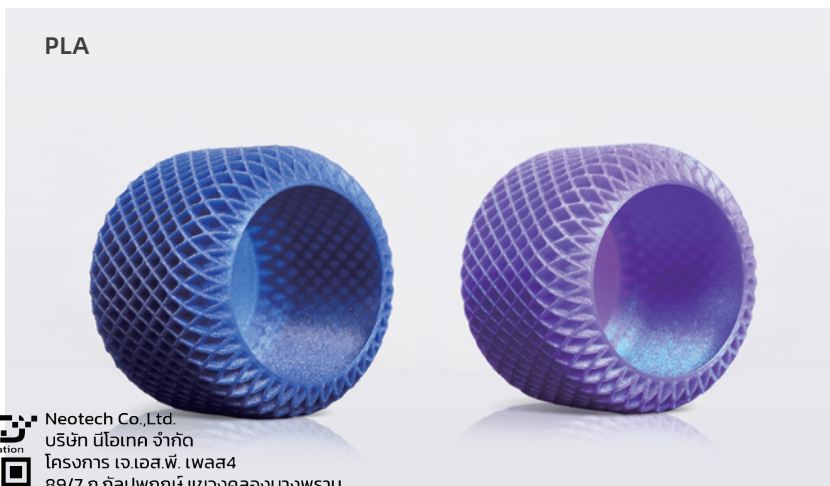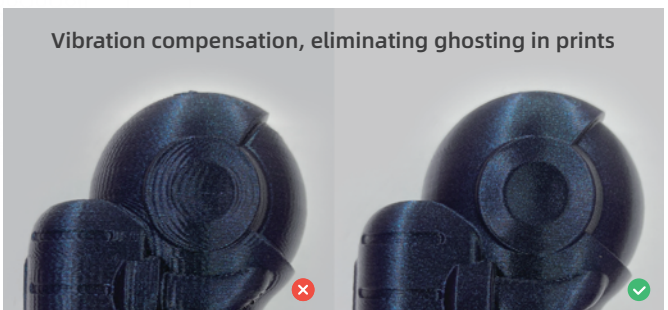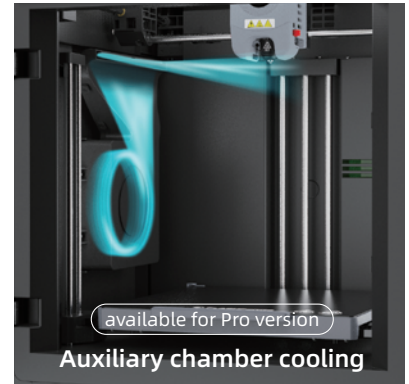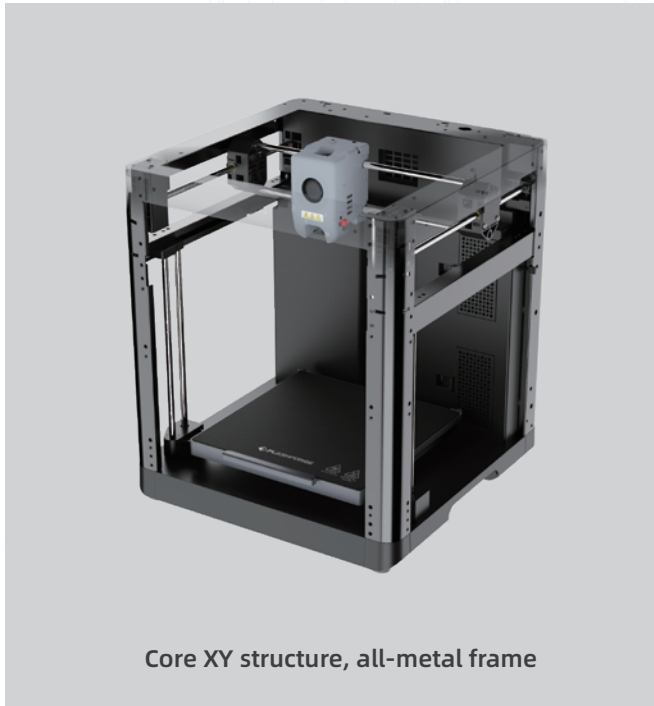


Neotech Co., Ltd.
บริษัท นีโอเทค จำกัด
โครงการ เจ.เอส.พี. เฟส4
89/7 ถ.กัลปพฤกษ์ แขวงคลองบางพราง
เขตบางบอน กรุงเทพฯ 10150
Tel: 096-140-0420
098-448-4676
E-mail: Sales@print3dd.com

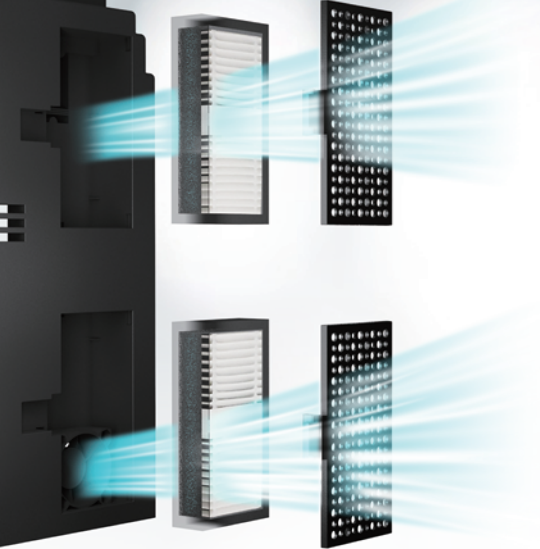


Eco-friendly printing

Adventurer 5M Pro adopts a dual filtration system of internal and external circulation. Dual-layer filtration: HEPA13 and activated carbon, effectively blocking 99% of particles and VOCs, thus protecting your respiratory system.



Internal Circulation Filtration

Continuously filters and circulates the air inside the chamber.
(Suitable for ABS, etc.)

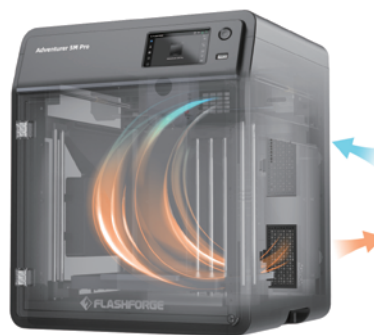

External Circulation Filtration

Draws fresh air from the outside into the chamber while the filtered internal air circulates outside the printer.
(Suitable for PLA/PETG, etc.)



50dB low-noise printing,
no disturbance to work
or study

available for Pro version



3D
Digital Fabrication



www.print3dd.com

Neotech Co.,Ltd.

บริษัท นีโอเทค จำกัด

โครงการ เจ.เอส.พี. เพลส4

89/7 ถ.กัลปพฤกษ์ แขวงคลองบางพราน

เขตบางบอน กรุงเทพฯ 10150

Tel : 096-140-0420


098-448-4676

E-mail : Sales@print3dd.com

Easy-maintenance nozzle for both rookies and experts

Quick-detachable nozzle requires no tools for change in just 3 seconds

Various nozzle diameter (0.25/0.4/0.6/0.8mm) options suitable for both high-precision and high-efficiency mode

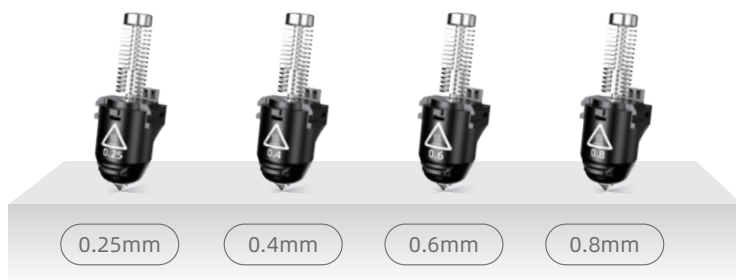

Remote Camera Monitoring

available for Pro version



Filament Run-out Reminder



Automatic Shutdown

available for Pro version



Power Loss Recovery



Flexible PEI Steel Plate



Integrated Printing Management

Adventurer 5M Pro

Enclosed 3D printer equipped with a dual filtration system, suitable for use in closed environments such as study rooms and classrooms



Adventurer 5M

Open 3D printer, suitable for use in open and well-ventilated environments



Neotech Co., Ltd.
บริษัท เนotech จำกัด
โครงการ เวิลด์เทรด เซ็นเตอร์
89/7 ถนนพหลโยธิน แขวงจตุจักร กรุงเทพมหานคร 10150
Tel : 096-140-0420
098-448-4676
E-mail : Sales@print3dd.com

Parameters

Machine Name	Adventurer 5M Pro	Adventurer 5M
Extruder	Direct drive; Qty: 1	Direct drive; Qty: 1
Filament	*PLA/*PETG/*TPU (0.4mm nozzle) ABS/ASA PLA-CF/PETG-CF (0.6/0.8mm nozzle) <small>Note: Materials marked with * are recommended for printing.</small>	*PLA/*PETG/*TPU (0.4mm nozzle) PLA-CF/PETG-CF (0.6mm nozzle) <small>Note: Materials marked with * are recommended for printing.</small>
Nozzle Diameter	0.4mm/0.6mm/0.8mm/0.25mm	0.4mm/0.6mm/0.8mm/0.25mm
Extruder Temperature	280°C	280°C
Platform Temperature	100°C	100°C
Build Volume	220*220*220mm	220*220*220mm
Speed	Max traveling speed: 600mm/s	Max traveling speed: 600mm/s
Acceleration	Max acceleration: 20000mm/s ²	Max acceleration: 20000mm/s ²
Build Plate	Flexible removable PEI steel plate	Flexible removable PEI steel plate
Display Screen	4.3-inch	4.3-inch
Device Size	380*400*453mm (excluding the spool holder)	363*376*413mm (excluding the display screen and spool holder) 363*402*448mm (including the display screen, excluding the spool holder)
Power Supply	AC 100~240V, 50/60Hz, 350W	AC 100~120 / 200~240V, 50/60Hz, 350W
Compatible Slicing Software	FlashPrint/Prusa Slicer/Cura/Orca Slicer	FlashPrint/Prusa Slicer/Cura/Orca Slicer
Air Filtration	Internal circulation + external circulation (HEPA 13 + activated carbon)	/
Shell	Enclosed	Open
Noise	Low-noise mode: 50dB; Standard mode: 55dB	/
Connectivity	Wi-Fi; Ethernet; USB	Wi-Fi; Ethernet; USB
Other Functions	Camera monitoring; Filament run-out reminder; Automatic shutdown; Power loss recovery	Filament run-out reminder; Power loss recovery

